

# FINWOOD

Daily Pleasures



**Safe Plus**  
Antiviral & Antibacterial Surface

**Digital Plus**  
Technology

Il calore del legno nelle suggestioni del quotidiano.  
Lo scandire del tempo in una coccola.

The warmth of wood in everyday suggestions.  
Pacing time in an embrace.



Finewood Natural 30180

**Finewood s'ispira ad ambienti che evocano un senso di benessere diffuso nel tempo e nel luogo**, in ogni possibile declinazione. **Una dimensione quotidiana di abitudini spensierate.** La casa, intesa come ristoro dell'anima. Non solo: tutti quei luoghi che vogliono celebrare **la naturale impronta dell'uomo, l'armonia dei sensi, l'accoglienza.**

**Finewood is inspired by spaces that create a feeling of wellness, that spreads over time and space**, in every possible aspect. **A daily dimension of carefree habits.** The home, understood as a haven for the soul. It is more than that: all of those places that wish to celebrate **man's natural footprint, the harmony of the senses, welcoming.**



Finewood Natural 30180



Floor / Finewood Nut 30180  
Counter / Silkystone Light 120120 (SILKYSTONE Collection)



Finewood Nut 30180

## Colours Colori • Farben • Couleurs • Цвета



## Sizes Formati • Formate • Format • Форматы


	30x180 12"x72"	30x120 12"x48"	20x120 8"x48"	<b>Chip</b> 26x40 10"x16"
Surface	NAT	NAT	NAT	NAT / KRY
Honey	Finewood Honey 30180 CSAFWHO318	Finewood Honey 30120 CSAFWHON30	Finewood Honey 20120 CSAFWHON20	Chip Finewood Honey CSACHFO40
Natural	Finewood Natural 30180 CSAFWNA318	Finewood Natural 30120 CSAFWNAT30	Finewood Natural 20120 CSAFWNAT20	Chip Finewood Natural CSACHFNA40
Nut	Finewood Nut 30180 CSAFWNU318	Finewood Nut 30120 CSAFWNUT30	Finewood Nut 20120 CSAFWNUT20	Chip Finewood Nut CSACHFNU40
Dark	Finewood Dark 30180 CSAFWDA318	Finewood Dark 30120 CSAFWDAR30	Finewood Dark 20120 CSAFWDAR20	Chip Finewood Dark CSACHFDA40
Pz / Box	4	4	6	8
Mq / Box	2,16	1,44	1,44	0,62
Kg / Box	48,6	32,4	32,4	13,6
Kg / Mq	22,5	22,5	22,5	21,9
Boxes / Pallet	24	24	36	42
Mq / Pallet	51,84	34,56	51,84	26,04
Kg / Pallet	1.166	778	1.166	571

## Decors&Accessories



## Number of patterns

Numero di grafiche • Grafische Nummer • Nombre d'images • Количество графических оформлений




## Special Trims • Pezzi Speciali • Formteile • Pièces Spéciales • Специальные Изделия

	Battiscopa 60 7,3x60 3"x24"	Gradone 120 33x120 13"x48"	Ang. Gradone 120 Sx 33x120 13"x48"	Ang. Gradone 120 Dx 33x120 13"x48"
Surface	NAT	NAT	NAT	NAT
Battiscopa 60 Finewood Honey	CSABFIHO60	Grad. 120 Finewood Honey	Ang. Grad. 120 Sx Finewood Honey	Ang. Grad. 120 Dx Finewood Honey
Battiscopa 60 Finewood Natural	CSABFINA60	Grad. 120 Finewood Natural	Ang. Grad. 120 Sx Finewood Natural	Ang. Grad. 120 Dx Finewood Natural
Battiscopa 60 Finewood Nut	CSABFINU60	Grad. 120 Finewood Nut	Ang. Grad. 120 Sx Finewood Nut	Ang. Grad. 120 Dx Finewood Nut
Battiscopa 60 Finewood Dark	CSABFIDA60	Grad. 120 Finewood Dark	Ang. Grad. 120 Sx Finewood Dark	Ang. Grad. 120 Dx Finewood Dark
	14	2	1	1

## Surfaces Superfici • Oberflächen • Surfaces • Поверхности

### Safe Plus Antiviral & Antibacterial Surface

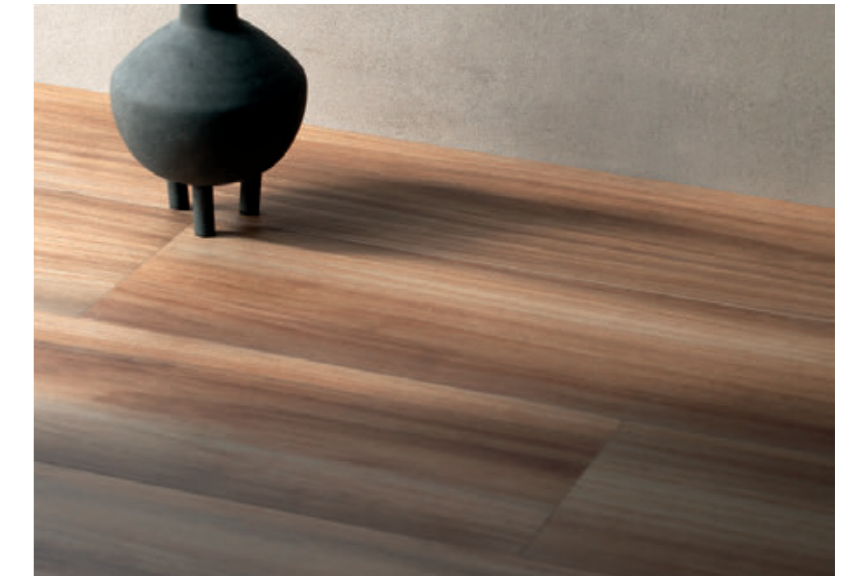

## Certifications

Certificazioni • Zertifizierungen • Certifications • Сертификаты



Static coefficient of friction **ASTM** test  
ASTM C1028 - 06

Dynamic coefficient of friction **DCOF** AcuTest®  
ANSI A137.1 - 2012

Dry  $\mu > 0,6$     Wet  $\mu > 0,6$   
Natural Surface - Antislip

WET  $\geq 0,42$   
Natural Surface - Antislip

## Suggestion for laying

Consigli per la posa • Ratschläge für die Verlegung  
Conseil pour la pose • Советы по укладке

Considering the characteristics of this series we suggest:  
• 2-3 mm joint  
• Lined uplaying or 4/5 staggered laying is suggested

Viste le caratteristiche della serie si consiglia:  
• Fuga 2-3 mm  
• Si consigliano pose affiancate o a correre sfalsate di 4/5

Im Hinblick auf die Eigenschaften der Serie es empfiehlt sich:  
• 2-3 mm Fuge  
• Neben verlegt oder 4/5 versetzt

Vu les caractéristiques de la série, nous conseillons:  
• Joint 2-3 mm  
• Il est conseillé une pose alignée ou une pose décalée au 4/5

В силу характеристик данной серии рекомендуется:  
• Шов 2-3 мм  
• рекомендуем укладку с плитками, расположенных рядом или уложенные со сдвигом 4/5